



# VRX1000 VEHICLE RADIO EXTENDER

Public safety agencies and utilities seeking alternative methods for portable radio coverage enhancement can safely rely on the VRX1000 Vehicle Radio Extender. The Futurecom VRX1000 is a compact 3 W simplex radio extender integrated with Motorola APX™ 8500, APX 7500, APX 6500, APX 5500, APX 4500 and APX 2500 mobile radios. A scaled down version of the industry-leading 10 W full duplex DVRS, the VRX1000 improves portable radio coverage while keeping users connected to conventional and trunked networks. The small size of the VRX1000 allows it to be easily installed in patrol cars and utility trucks.

## KEY FEATURES AND BENEFITS

- Programmable output power: 0.5 - 3 W
- Simplex operation.
- Analog operation with P25 software upgrades available.
- Available in VHF, UHF, 700/800 MHz bands.
- Integrates with remote mount APX 8500, APX 7500, APX 6500, APX 5500, APX 4500 and APX 2500 mobile radios.
- In-Band or Cross-Band configurations.
- Operated through mobile radio control head.
- Sold exclusively through Motorola Solutions.

## GENERAL SPECIFICATIONS

Dimensions: Height x Width x Depth, Weight	45 x 175 x 160 mm (1.7 x 6.8 x 6.2 in), 2.0 kg (4.4 lb) (cross-band, no filters)
Channel Spacing	12.5 or 25 kHz programmable (25 kHz operation not available in USA)
Number of Channels	192 (1 Channel when in VRS750-compatible mode)
Number of VRX Enabled Mobile Radio Channels	2047 entries
CTCSS/DCS	Programmable per Analog Channel
Power Supply	13.8 V DC $\pm$ 20%, negative ground only

### DC CURRENT DRAIN (VRX1000 ONLY):

VRX1000 Off	0.01 A Max
VRX1000 Standby	0.8 A
VRX1000 Receive	0.8 A
VRX1000 Transmit	3.0 A

### EXTERNAL CONNECTORS

Antenna	Mini UHF, 50 Ohms
Mobile Radio	DB25
Auxiliary / Options	DB15 (Y cable)
DC Power	M12 Circular
Computer Interface	Mini USB

### ENVIRONMENTAL

Operating Temperature	-30 °C to +60 °C (-22 °F to +140 °F)
Storage Temperature	-40 °C to +85 °C (-40 °F to +185 °F)
Protection Against Liquids	IP54



## EQUIPMENT TYPE ACCEPTANCE

	VHF	UHF	700 / 800 MHz
FCC	LO6-VRX1000	LO6-VRX1000	LO6-VRX1000700800
Industry Canada	2098B-VRX1000	2098B-VRX1000	2098B-VRX10007800
Safety	EN60950-1	EN60950-1	EN60950-1

## TRANSMITTER SPECIFICATIONS

	VHF	UHF	700 / 800 MHz
Frequency Band FCC [MHz]	136-174 MHz	380-406 MHz 406.1-512 MHz	764-775 MHz 851-869 MHz
Frequency Band IC [MHz]	138-174 MHz	406.1-430 MHz 450-470 MHz	768-776 MHz 851-869 MHz
Power Output @ Antenna Port	Programmable 0.5 – 3 W		
Duty Cycle	50% Receive / 50% Transmit		
CTC Option	15 sec to 15 min or Disabled		
Max Spurious Output	-20 dBm		
Frequency Stability (-30 °C to +60 °C; +25 °C Ref.)	$\pm$ 0.75 ppm		
FM Hum and Noise 12.5 / 25 kHz	-34 dB / -40 dB		
Audio Response	+1, -3 dB of 6 dB / octave pre-emphasis characteristic over 300 Hz to 3 kHz		
Audio Distortion	<2%		

## RECEIVER SPECIFICATIONS

	VHF	UHF	700 MHz
Frequency Band FCC [MHz]	136-174 MHz	380-406 MHz 406.1-512 MHz	764-775 MHz 851-869 MHz
Frequency Band IC [MHz]	138-174 MHz	406.1-430 MHz 450-470 MHz	768-776 MHz 851-869 MHz
Receiver Sensitivity		Analog 12 dB SINAD: -115 dBm Digital P25 5% BER: -115 dBm	
Frequency Stability (-30°C TO +60°C; +25°C Ref.)		±0.75 ppm	
Selectivity 12.5 / 25 kHz		-60 dB / -70 dB	
Intermodulation		-70 dB	
Spurious Rejection		-70 dB	
Analog Mode Deviation (12.5 / 25 kHz)		±2.5 kHz / ±5 kHz	
Frequency Deviation For C4FM (P25)		Low Level: 841-1037 Hz High Level: 2543-3110 Hz	
Analog Mode FM Hum And Noise (12.5 / 25 kHz)		-34 dB / -40 dB	
Audio Output (Repeater Detect Audio)		600 mV RMS nominal, flat response	
Audio Response	+1, -3 dB of 6 dB / octave de-emphasis characteristic over 300 Hz to 3 kHz		
Audio Distortion	< 2%		

## MILITARY STANDARDS COMPLIANCE


High Temperature	501.6 I - A1 501.6 II (Operational)
Low Temperature	502.6 I - C3 502.6 II (Operational)
Temperature Shock	503.6 - C Procedure I
Rain	506.6 III
Humidity	507.6 Procedure II (Aggravated)
Salt Fog	509.6
Vibration	514.7 - I Category 24
Mechanical Shock	516.7 Procedure I (Function) 516.7 Procedure VI (Bench Handling)

Note: To ensure interference-free performance when Mobile Radio and VRX are both active, there must be at least 30 dB isolation between antennas.


\*Note: Specifications subject to change without notice.



# VRX1000 VEHICLE RADIO EXTENDER

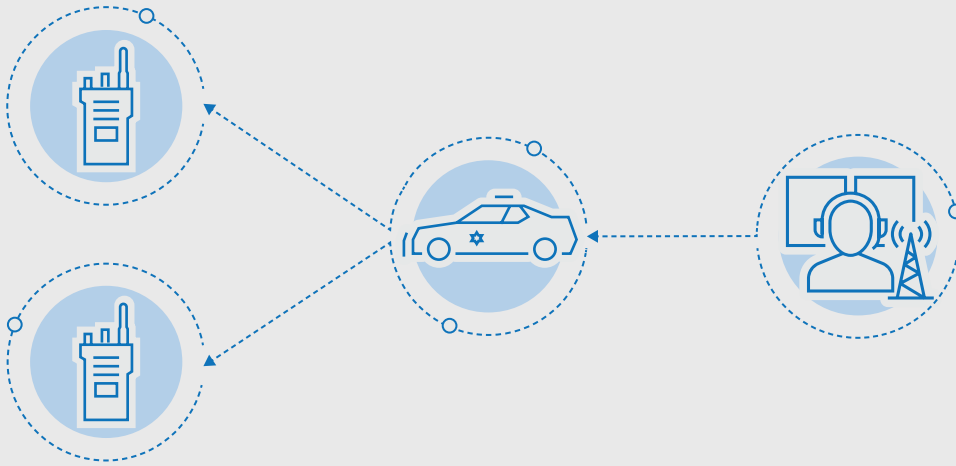

VRX1000-equipped vehicle extends simplex communications to portable radios from dispatch

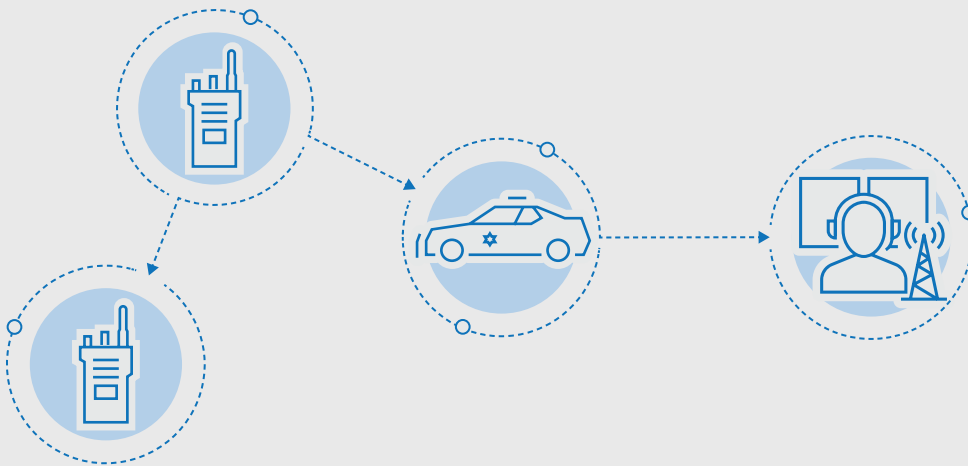

VRX1000-equipped vehicle extends simplex communications from portable radios to dispatch



Motorola Solutions, Inc. 500 West Monroe Street, Chicago, IL 60661 U.S.A. [motorolasolutions.com](http://motorolasolutions.com)

MOTOROLA, MOTO, MOTOROLA SOLUTIONS and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. Futurecom, PDR8000, the Futurecom Logo and the Stylized FC logo are registered trademarks of Futurecom Systems Group, ULC. All other trademarks are the property of their respective owners. © 2020 Motorola Solutions, Inc. All rights reserved. Specifications are subject to change without notice. 11-2020

